



# Magnum Case History



**Project Name:** Bluegrass Station

**General Contractor:** Baesler Construction



**Magnum Installer:** Dwyer Companies  
Lexington, KY  
[www.dwyercompanies.com](http://www.dwyercompanies.com)

**Project Type:** Foundation Repair, Tie Backs, Underpinning, Pressure Grouting, Slabjacking

**Location:** Lexington, KY

**Project Description:** Emergency Wall Repair

An exterior wall was severely bowed. The existing footings had settled, and the foundation was rotating and leaning outward. Dwyer installed 29 Magnum Helix Tie Backs, 8 Magnum Push Piers, pressure grouted 8' below the footings to fill voids, and then slabjacked the interior floor slab 2". Dwyer successfully completed the job on March 4, 2005.

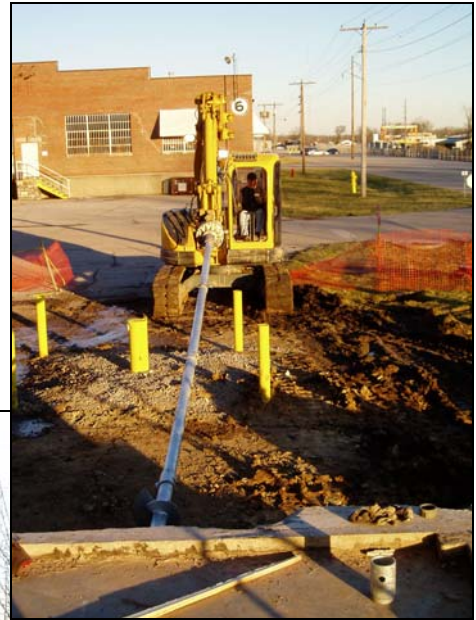

## Foundation Repair, Helix Tie Backs, Underpinning, Pressure Grouting, Slabjacking

