

# MAGNUM® MP7100K Ram Kit

## 12 Ton Maximum Capacity

2.00" Bore, 12" Stroke, 7,500 psi Maximum Pressure


Hydraulic Ram Assembly for MP212 Push Pier Shaft



### Description


Magnum MP7100K Push Pier Rams are used for installation and load testing Magnum MP212 push piers. The ram has an ultimate capacity of 12 tons at maximum pressure. It is used for repair, lifting, and permanent support of existing foundations. Ram height with channels is 52-7/8 inches. The assembly can accommodate push pier columns up to 18" long that are coupled together by male-female slip connections. Additional push pier column sections can be added until the pier reaches adequate bearing material and a successful load test is achieved. Ram shoe fits various Magnum foundation brackets. Permanent pier to bracket connection is made with up to three (3) 3/4" Grade 8 bolts.

Hydraulic Ram

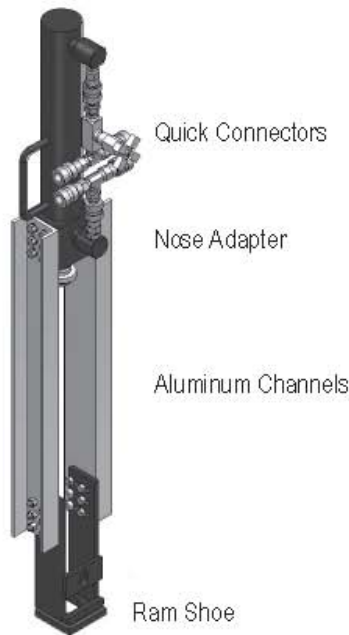

SPECIFICATIONS	
Bore	2.00" Dia.
Piston Rod	1.25" Dia.
Stroke	12"
Max. Pressure	7,500 psi
Burst Pressure	15,000 psi
Bolts	(1) 3/4"
Nose Adapter	1.75" Dia. (Fits MP212 Push Pier Shaft)
Hydraulic Hose	3/8" Dia.

Ram Force Calibration

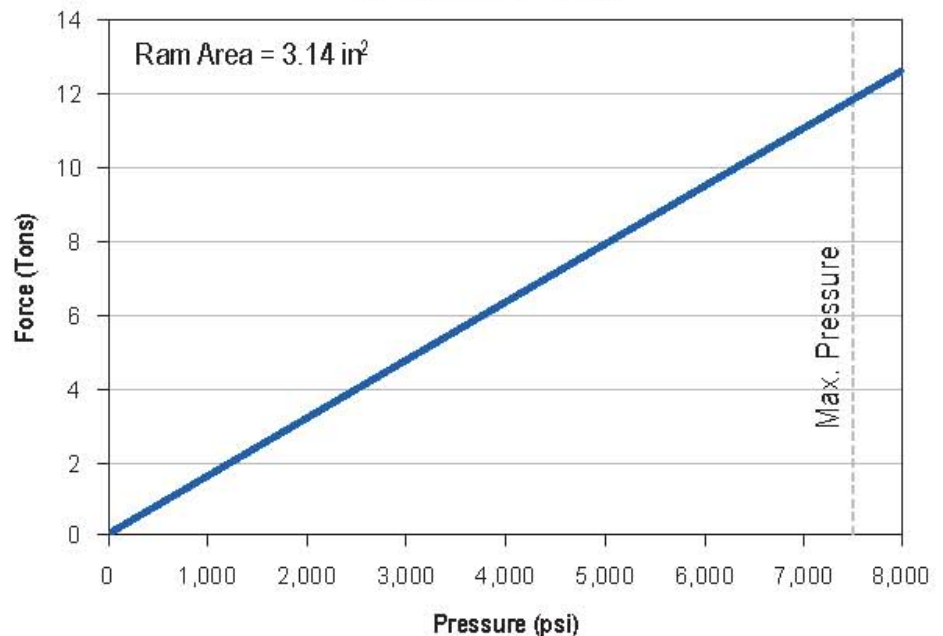

**Note:** Magnum's push piercing system is used for stabilization and lifting. Bracket connection to structure, required pier capacity, and pier spacing should be designed by a professional engineer taking into account the thickness, weight, live loads, and punching shear strength of the existing foundation.

### Magnum Piering, Inc.

6082 Schumacher Park Dr.  
West Chester, OH 45069  
800-822-7437  
www.magnumpiering.com

**All Magnum Products Made in U.S.A.**

U.S. Patents 6,058,662 and 5,234,287; Other Patents Pending.