

# MAGNUM® MHC1300-18O2424B3 Bearing Plate Cap


## Allowable Capacity 119 Tons Compression / 119 Tons Tension

### 24" x 24" x 7/8" Bearing Plate & 19.0-Inch I.D Collar


### Fits MH1843 Helical Screw Piles

**Description:** MAGNUM® Bearing Plate Caps consist of a collar tube with bolt holes for connection to MAGNUM® helical screw piles and steel bearing plate for embedment in cast-in-place concrete. MAGNUM® products are manufactured in the USA according to our ISO 9001 approved quality program. Structural capacities are developed according to AISC 360 and ACI 318 considering an average design life of 75 years for bare steel in most soil conditions. Hot-dip galvanizing is available upon request. Design and detailing of the structure to which the bearing plate cap is embedded in varies by project and is the responsibility of the registered design professional.

Specifications	
Collar Tube	0.5" x 19" I.D. A5TM A252, Fy= 50 ksi or Better
End Effector	24" x 24" x 7/8" Steel Bearing Plate
Pile Connection	(3) 1-1/2" ASTM A193 B7 Zinc Coated to ASTM B695/F194
Coating	Galvanized per ASTM A153/A123 (G), Bare Steel (NG), or Epoxy Coated per ICC-ES AC228 (EP)
Compatibility	MH1843-6
Capacity	
Ultimate Compression/ Tension	238 Tons / 238 Tons
Allowable Compression/ Tension	119 Tons / 119 Tons

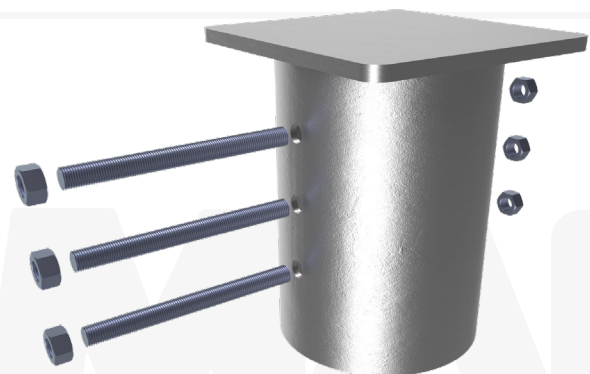

**Notes:** Cap capacity is developed using the ASD design method and considers strength of collar, end effector, and pile connection. Capacity may be limited by the helical pile, bearing/pullout capacity of soil, or strength of the concrete the cap is embedded in.

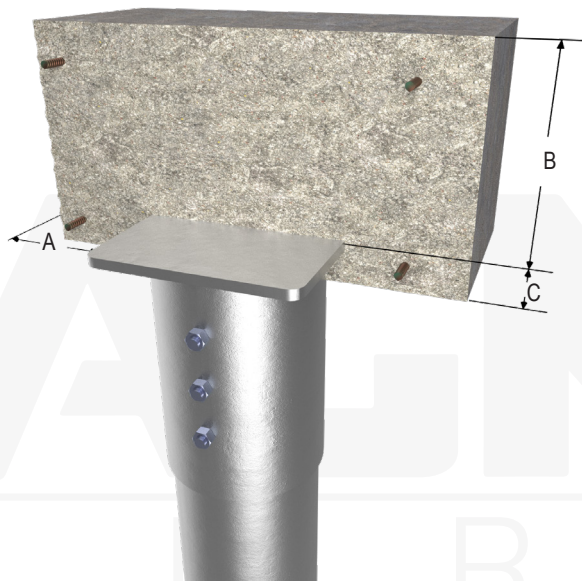

**Installation Notes:** After installation of a MAGNUM® Helical Pile to the correct depth, torque, and capacity, cut-off the pile shaft at the proper elevation. Drill (3) 1-9/16" diameter holes through the shaft using a MAGNUM® drill template, place the cap over the shaft and secure with (3) 1-1/2" bolts. Snug tighten nut. Ensure direct bearing of plate on shaft. Place reinforcing steel, cast concrete and consolidate around the pile cap per project requirements.

A - As Required for Shear (Min. 4" per IBC)  
B - As required for Compression. See pages 184-185.  
C - As Required for Tension (Min. 3" per IBC). See pages 184-185.

**MAGNUM®**  
PIERING  
designed to support

156 Circle Freeway Dr.  
Cincinnati, OH. 45246  
800-822-7437  
www.MagnumPiering.com