


# MAGNUM® MMC818B Column



HSS8x8x3/16 and Connection Box with (4) Tapped Holes Each Side for 7/8" - 9 UNC Bolts



## Description

The Magnum® MMC818B Moment Frame Columns are made of Hollow Structural Sections (HSS) with bearing plate welded to the bottom of the column. The top of the column is fitted with a Magnum Moment Frame Column Cap, which is designed for easy and secure connection between the column and beam of the Magnum Moment Frame. Column, Column Cap, and Bearing Plate are galvanized steel. Allowable axial compression load for a 9 foot column height is 62 tons.

SPECIFICATIONS	
Shape	HSS8x8x3/16 Column ASTM A500 Gr. B 46 ksi, or Equivalent
I	New = 54.4 in <sup>4</sup>
A <sub>g</sub>	New = 5.37 in <sup>2</sup>
S	New = 13.6 in <sup>3</sup>
Height	Custom
Bolts	(4) 3/4"-16 UNF SAE J429 Grade 5 Zinc Coated to ASTM B695/F1941
Surface Coating	Galvanized per ASTM A153/A123 (G)

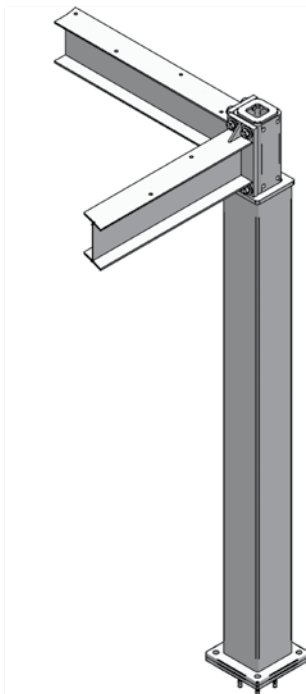

### Installation Notes:

Determine the minimum column length based on the elevation certificate for the project. The bottom flange of the beam shall be one foot higher than the Base Flood Elevation (BFE). BFE is determined based on Coastal Construction Zone and FEMA flood mapping for specific project location.

*All Magnum Products Made in U.S.A.*  
U.S. Patent 9249593; Other Patents Pending.

### Magnum Piering, Inc.

6082 Schumacher Park Dr.  
West Chester, OH 45069  
800-822-7437  
[www.magnumpiering.com](http://www.magnumpiering.com)

**Beams, Base Plate, and Concrete**  
Anchor Bolts Sold Separately